

## **KBH 4531**




**Oil Pattern Distance** 45 **Reverse Brush Drop** Oil Per Board Multi ul **Forward Oil Total** 11.474 mL **Reverse Oil Total Volume Oil Total** 21.069 mL 9.595 mL **Tank B Conditioner Tank Configuration Tank A Conditioner** N/A В

	START	STOP	LOAD5	MICS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	5L	2	60	14	В	8	0.0	1.9	1.9	480
2	5R	2R	2	60	14	В	8	1.9	5.8	3.9	480
3	8L	8R	1	24	14	В	25	5.8	7.7	1.9	600
4	2L	2R	1	50	10	В	37	7.7	9.1	1.4	1850
5	5R	2R	2	58	14	В	8	9.1	13.0	3.9	464
6	10L	9R	2	45	14	В	44	13.0	16.9	3.9	1980
7	12L	11R	2	25	10	В	36	16.9	19.7	2.8	900
8	13L	12R	4	25	10	В	64	19.7	25.3	5.6	1600
9	15L	14R	4	55	10	В	48	25.3	30.9	5.6	2640
10	5R	2R	2	60	18	В	8	30.9	36.0	5.1	480
11	2L	2R	0	60	10	В	0	36.0	45.0	9.0	C

	START	STOP	LOAD5	MICS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	60	14	В	0	45.0	38.0	-7.0	0
2	5R	2R	1	60	10	В	4	38.0	36.6	-1.4	240
3	2L	5L	1	60	10	В	4	36.6	35.2	-1.4	240
4	16L	16R	5	40	14	В	45	35.2	25.3	-9.9	1800
5	15L	13R	2	45	10	В	26	25.3	22.5	-2.8	1170
6	5R	2R	2	54	14	В	8	22.5	18.6	-3.9	432
7	5R	2R	2	60	14	В	8	18.6	14.7	-3.9	480
8	10L	10R	3	58	10	В	63	14.7	10.5	-4.2	3654
9	2L	5L	1	60	14	В	4	10.5	8.6	-1.9	240
10	5R	2R	2	58	14	В	8	8.6	4.7	-3.9	464
11	8L	8R	1	35	10	В	25	4.7	3.3	-1.4	875
12	2L	2R	0	60	10	В	0	3.3	0.0	-3.3	0

Cleaner Ratio Main Mix NA
Cleaner Ratio Back End Mix NA
Cleaner Ratio Back End Distance NA
Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50
Only compatible with ATLAS, ATLAS Walker or
ATLAS Pro lane machines.

Forward Reverse Combined

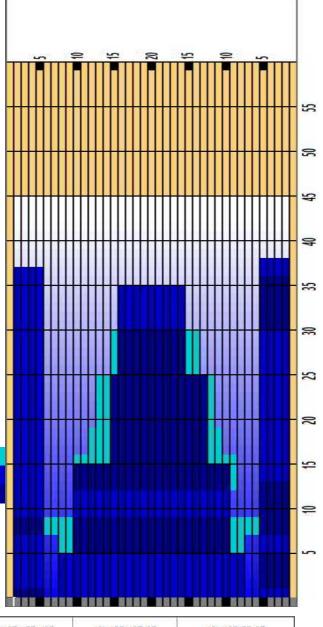

Track Zone Ratio	5.32	3.72	1.31	1.19	3.17	2.04
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Mlddle: Inside Track	Middle:Middle Track	Middle:Outside Track
Item	3L-7L;18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R

