




FIBC 2025



DISTANCE:	42 FEET	VOLUME:	29.1 mL
RATIO:	3.16:1	FORWARD:	15.15 mL
DROP BRUSH:	39 FEET	REVERSE:	13.95 mL
TANKS:		PUMP:	50µL

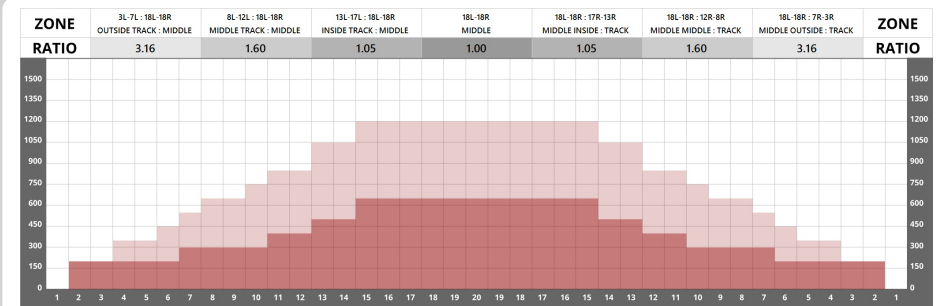

FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	DISTANCE	T.OIL
1	2L	2R	4	50	18	0 → 8	7,400
2	7L	7R	2	50	22	8 → 14	2,700
3	11L	11R	2	50	22	14 → 20	1,900
4	13L	13R	2	50	26	20 → 27	1,500
5	15L	15R	3	50	22	27 → 36	1,650
6	2L	2R	0	50	26	36 → 42	0

REVERSE LOADS DATA


#	START	STOP	LOADS	MICS	SPEED	DISTANCE	T.OIL
1	2L	2R	0	50	26	39 → 33	0
2	13L	13R	2	50	26	33 → 26	1,500
3	10L	10R	2	50	22	26 → 20	2,100
4	8L	8R	2	50	14	20 → 16	2,500
5	6L	6R	2	50	14	16 → 12	2,900
6	4L	4R	3	50	22	12 → 2	4,950
7	2L	2R	0	50	14	2 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | REVERSE DROP BRUSH

This pattern may require adjustments if using a lane machine that does not have these features

Created 一月 09, 2025 - Rendered for Atlas.

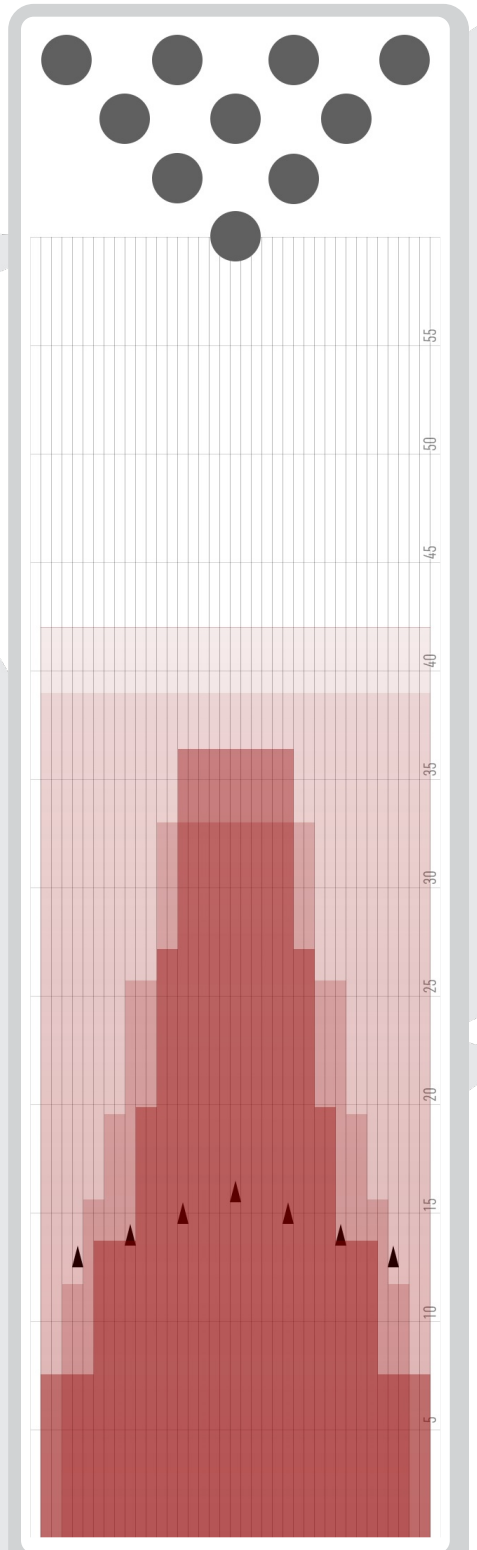

KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET



SCAN QR CODE FOR MORE PATTERNS ON KEGEL PATTERN LIBRARY

